

Flaretite* Seals



Along with the benefits of SAE 37°, come drawbacks. The metal-to-metal sealing surfaces are subject to damage both prior to installation and as the connections are re-used. Sealing surface imperfections lead to unwanted weeping and leaking joints.


Flaretite seals are ideal to enhance new installations of SAE 37° connections as well as seal off minor leaks and weeping connections.

Benefits

- Multiple surface contact points
- Locks the joint and fills surface imperfections
- Saves time and money associated with maintenance and rework
- Quick and easy assembly

Features

- Ribbed insert design
- Available sizes: -04 to -32
- Coated with Loctite** sealant
- Economical method to reduce minor leaks and weeping connections
- Built-in clip to attach to the nose of the SAE 37° connection

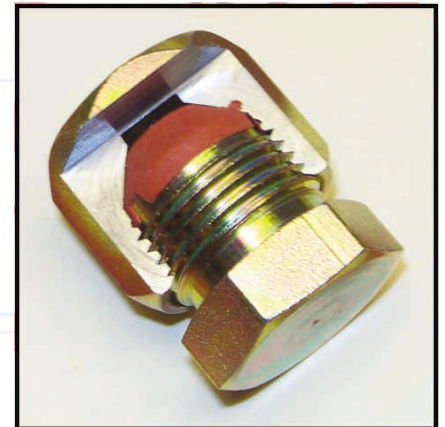

* Flaretite is a registered trademark of Flaretite Inc.

** Loctite is a registered trademark of Henkel Loctite Corporation

We keep you working.